

FEATURES

- Universal input
- Selectable output – analog (mA) or ON/OFF Relay
- Dual digital display along with bar display
- Simple 4 key user control
- Operation and Calibration through keyboard on front panel
- IP54 protection
- User friendly installation and operation



DC3010 – PID Controller is microcontroller based controller which offers versatility and accuracy for the most demanding control applications. The unit has an universal input which accepts direct signals from thermocouples, RTDs and linear voltage or current inputs and generates a control output signal of either 4 – 20 mA or time proportional relay output. Front panel control enables easy modification of system parameters. The digital display for process value and set point value along with bar display for output provides convenient monitoring of input and output signals. The control output type is PID action, which eliminates the need for continuous operator attention. Two independent auxiliary relays are fitted as standard with optional transmitter excitation supply.

SPECIFICATIONS:

Input	Universal TC, RTD and linear inputs (Refer Input table)
Accuracy	+/- 0.1% of span, +/- 1 count
Common mode rejection	120 dB@ 50Hz
Normal mode rejection	60 dB@ 50Hz
Input open protection	Upscale
Display	<ul style="list-style-type: none"> ▪ 4 digit 0.56" 7 segment LED for Process Value ▪ 4 digit 0.39" 7 segment LED for Set Point Value ▪ 10 segment red LED bar display for Output ▪ Individual status LEDs
Control type	PID
Control Action	Direct (Cool) and Reverse (Heat)
Control parameters	Proportional Band: 0 to 999.9 % of input span Integral time (Reset): 0 to 6000 seconds (0 = OFF) Derivative time (Rate): 0 to 3600 seconds (0 = OFF)
Auto / Manual Operation	Operator initiated from front panel , bumpless with in PB
Output	<ul style="list-style-type: none"> ▪ Current: 4 – 20 mA OR 0 – 20 mA ▪ Relay SPDT 3A / 230V AC resistive max
Load resistance	0 to 600 ohms (For current output)
Alarm output	2 no., 1 C/O contact relay output
Relay rating	3A / 230V AC resistive max.
Compensations	Automatic – cold junction for TC, wire resistance for RTDs


contd. specifications:

Input power supply	Universal SMPS suitable for 95 to 265V AC and 110 to 300V DC
ENCLOSURE:	
Enclosure	Flame Retardant ABS
IP Rating	IP54 (Front Panel)
Mounting type	Flush on panel
Panel cutout	92 × 92 mm
Bezel dimension	96 × 96 mm
Depth behind panel	125 mm including terminals
Gross Weight	480 gms
ENVIRONMENT:	
Operating temperature	5 to 55 Deg.C
Operating humidity	Up to 95% non condensing

INPUT TABLE:


INPUTS	TYPE	RANGE
Thermocouple	J	0 to 700 Deg. C
	K	0 to 1200 Deg. C
	R	-50 to 1765 Deg. C
	S	0 to 1766 Deg. C
	T	-100 to 400 Deg. C
	E	-100 to 1000 Deg. C
	B	250 to 1820 Deg. C
	N	0 to 1800 Deg. C
	RTD	PT100
PT100		0 to 600 Deg.C
mA DC	4 – 20 mA	} -1999 to +9999 Field programmable
	0 – 20 mA	
V DC	1 – 5 V	
	0 – 5 V	

DIMENSIONS IN mm:

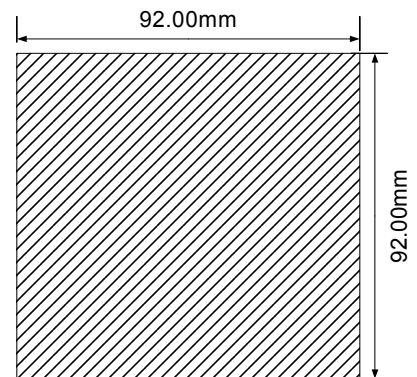

PANEL CUTOUT

ORDERING CODE:

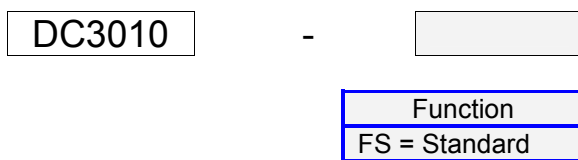

SAMPLE CODE ORDER:
DC3010 – FS
 Standard Controller